


JURA GREY LIMESTONE



Presenting with a thin to medium grain, Jura Grey is characterized by areas of darker colour variations throughout.

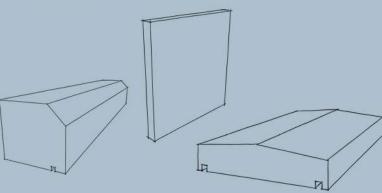

APPLICATION

EXTERIOR CLADDING INTERIOR CLADDING ULTRA THIN CLADDING COPINGS SILLS CAPS HIGHLY CUSTOMIZABLE

TECHNICAL SPECIFICATIONS

PETROGRAPHIC DESCRIPTION	BIOPELMICRITE
FLEXURAL STRENGTH	18.2 mPa
COMPRESSIVE STRENGTH	167 mPa
APPARENT DENSITY	165.85 lb/cu.ft.
MODULUS OF RUPTURE	15.74 mPa
WATER ABSORPTION	0.56%
REACTION TO FIRE	CLASS A1

NEED A SAMPLE? CONTACT US TODAY

Edmonton, Alberta 20203 – 113 Avenue NW ben.gillam@scorpiostone.com Ph: 780-477-1682

Vancouver, British Columbia 12240 Vickers Way ben.gillam@scorpiostone.com Ph: 604-249-0616

FINISHES

POLISHED

HONED

BRUSHED

SANDBLASTED

HAMMERED



JURA GREY LIMESTONE